

1.1 Information


Display the firmware version and network information.

If you want to add new radio station, you can find


1.2 Auto Upgrade

The system will check automatically if there is any updated firmware available.


The default is No.

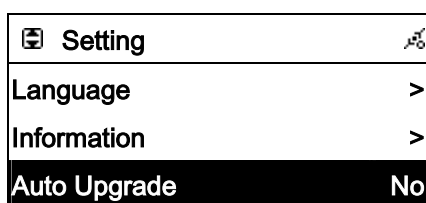

Select [Auto Upgrade]

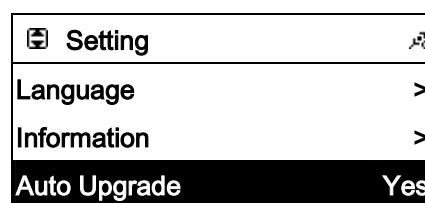

Press 「SELECT/OK」 to choose Yes / No

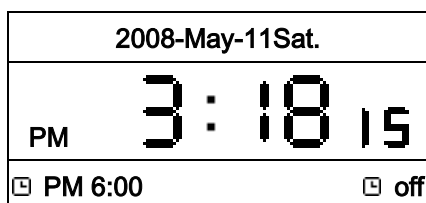


If it is Yes, the system will check if there is any updated firmware available while in Standby mode



Confirm

1.3 Reset All Settings

- Reset all settings to factory default.

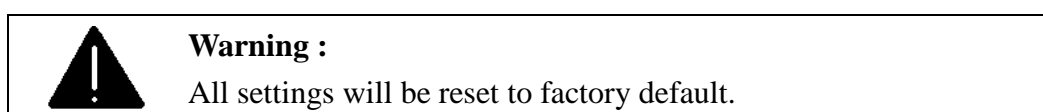

1.4 Firmware Upgrade

Support upgrade by using USB or SD/MMC

Support online upgrade

1.4.1 Upgrade firmware by using USB / SD/MMC

1. Get an accurate firmware version (please check your model number) from manufactures. The firmware version file appears as .UPG file.
2. Copy the file [**image.upg**] to the root directory on an USB disk or SD/MMC card.
3. Insert the USB disk or SD/MMC card into the USB connector or SD/MMC slot.
4. Press 「**Setting**」 button, then scroll up/down to [**Upgrade**] and press 「**SELECT/OK**」 button.
5. Scroll up/down to [**Yes**] and then press 「**SELECT/OK**」 button to upgrade.
6. Smart Boombox will restart automatically after finishing upgrade.
7. SBMM must not be switched off or press any function key during the upgrade procedure.

NOTE: It strongly recommends resetting all setting after the system is upgraded.

Table 1.4.1

Setting	↻
Information	>
Reset all	>
Upgrade	>

Select [Upgrade], then press 「SELECT/OK」

→


Upgrade	↻
Image Source	USB
Upgrade	>

Select [Upgrade], then press 「SELECT/OK」




Confirm

→

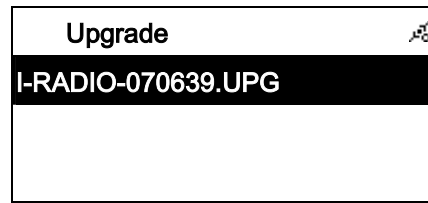

Select the firmware and Press 「SELECT/OK」

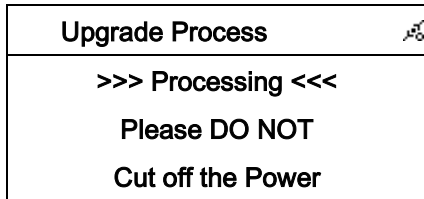


Upgrading the firmware

→



Processing...

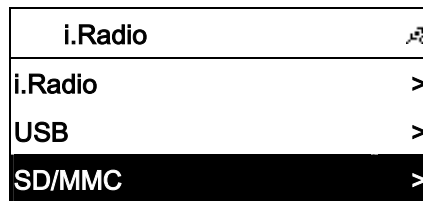


The upgrade is complete.

1.4.2 On-line upgrade


1. Make sure the internet environment is ready
2. Press 「**Setting**」 button, then scroll up/down to [**Upgrade**] and press 「**SELECT/OK**」 button.
3. Smart Boombox will restart automatically after finishing upgrade.
4. SBMM must not be switched off or press any function key during the upgrade procedure.

NOTE: It strongly recommends resetting all setting after SMBB is upgraded.

Table 1.4.2

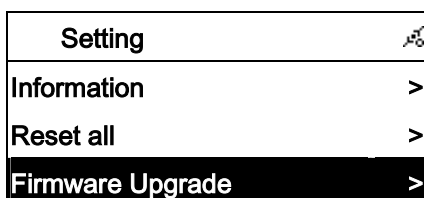

→

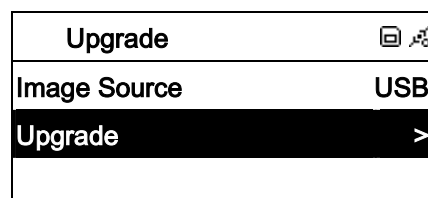


Select [Upgrade], then press 「SELECT/OK」


Select [Upgrade], then press 「SELECT/OK」




Confirm

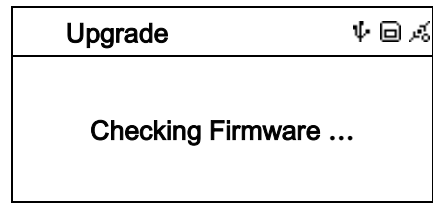


Checking if there is any update firmware

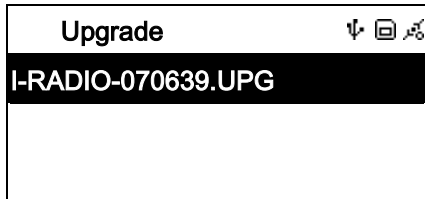

Select the firmware and Press 「SELECT/OK」

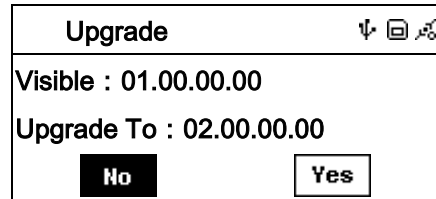


Select [Yes] to confirm

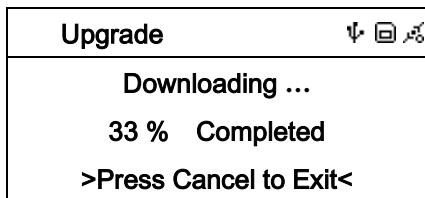

Downloading...press 「ESC/STOP」 to cancel
download



Processing...

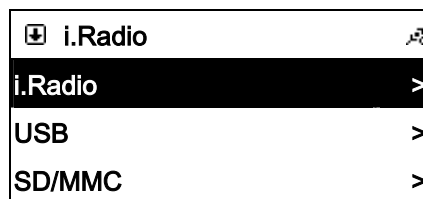

The upgrade is complete.