



CS62U

2-Port USB KVM Switch

CS62U 2-Port USB KVM Switch has a handy design integrating with 1.8m of cables. It can control 2 servers via a single console.

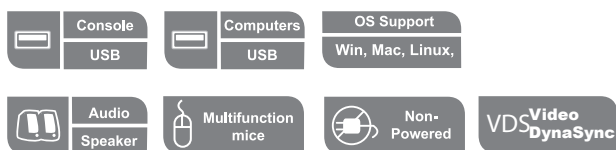

Diagram

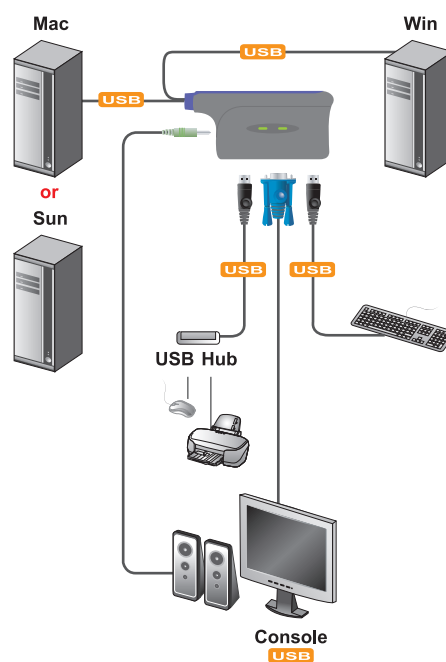

Supports computers that are equipped with speakers

Features

- One USB console controls two USB computers
- Compact design, built-in 1.8 m cables
- Hotkey selection for OS and keyboard language
- Multiplatform support — Windows, Linux, Mac, Sun
- Video DynaSync™ – stores the console monitors' EDID (Extended Display Identification Data) to optimize display resolution
- USB mouse port can be used for USB hub and USB peripheral sharing
- Supports multimedia USB keyboards and multifunction mice
- All-in-one design
- With speaker support
- Superior video quality – up to 2048 x 1536; DDC2B
- Auto Scan function to monitor computer operation
- Non-powered
- ATEN USB ASIC inside

Specifications

Function			CS62U
Computer Connections			2
Computer Port Selection			Hotkey
Connectors	Console Ports	Keyboard	1 x USB Type A Female (White)
		Video	1 x HDB-15 Female (Blue)
		Mouse	1 x USB Type A Female (White)
		Speaker	1 x Mini Stereo Jack Female (Green)
	KVM Ports	Keyboard/Mouse	2 x USB Type A Male (Black)
		Video	2 x HDB-15 Male (Blue)
		Speaker	2 x Mini Stereo Plug Male (Green)
LED	Selected		2 (Green)
Cable Length	Computers		0.9 m
Emulation	Keyboard/Mouse		USB
Video			2048 x 1536, DDC2B
Scan Interval			5 seconds
Environment	Operating Temp.		0°~50°C
	Storage Temp.		-20°~60°C
	Humidity		0~80% RH, Non-condensing
Physical Properties	Housing		Plastic
	Weight		0.40kg
	Dimensions (L x W x H)		8.10 x 6.90 x 2.60 cm

* The specifications and pictures are subject to change without notice.