



# Easy Connect®

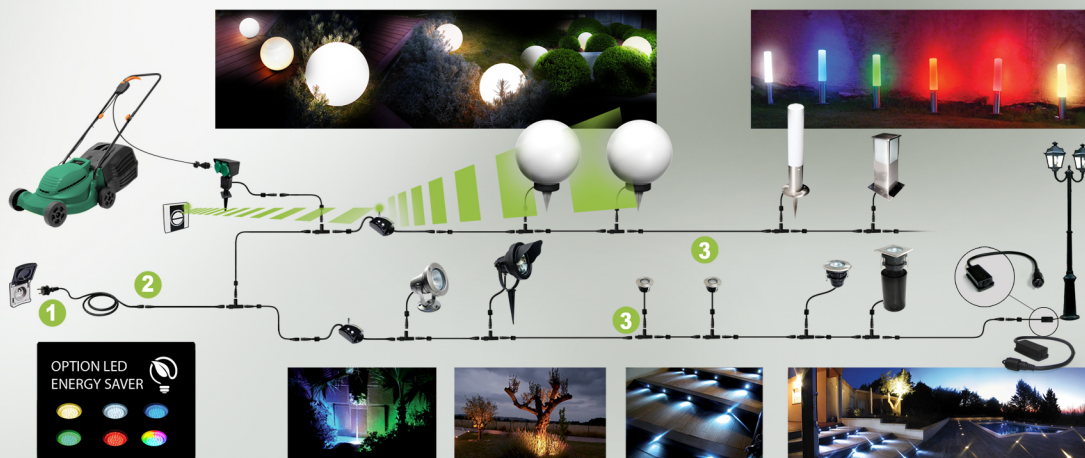

## EASY VIDEO

www.easy-connect.hk/ECvideo



## EASY WEB

www.easy-connect.hk



## EASY DESIGNER

www.easy-connect.hk/ECdesigner

Create your own  
PROJECT  
in 5 minutes



D E S I G N I N G


# Easy Connect®

GARDEN



- The external flexible cable or cord and non-replaceable component of the luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
- Luminaires shall be connected to the supply in compliance with the national standard of the country where the luminaires will be installed.
- Suitable pedestrians and pedal cycles only
- Rated load : 5000N.
- This luminaire is to be mounted on conjunction with drainage.
- The actual value of height from the top side protruding over the ground is : 6 mm.


65576

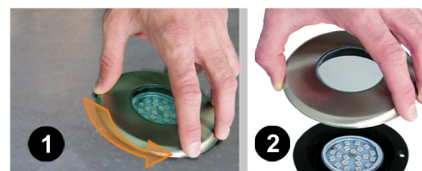

## LED

INPUT 220 - 250 VAC  
(50/60Hz)

POWER MAX:  
4 W/Unit



IP65 CE

Applicable area: pedestrian area only