



1. Production outlines (Moulded 21 PIN Plug to Plug Scart (180°) Assembled Pearl Chrome-Plated Metal Shell)

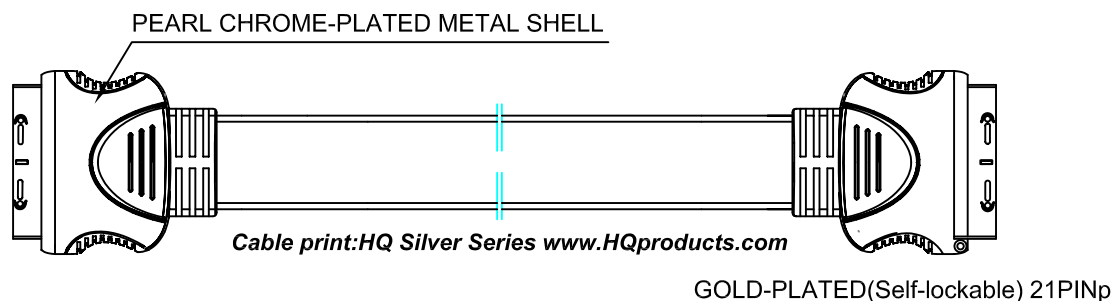


2. Structure of cable

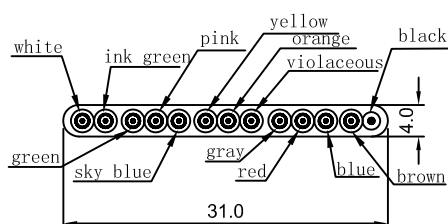

Inner conductor: 12*10/0.12Cu insulation: PE 12* ϕ 1.0
 Spiral: 12*(28/0.12Cu) outer isolation: Hi-Flex PVC 12* ϕ 2.0
 D.W.: inner conductor 7/0.16TIN cover copper outer jacket: PP ϕ 1.5

3. Wiring diagram

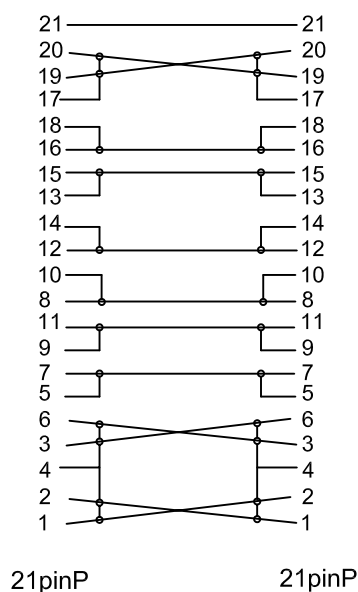

Nedis number	Length
HQSS1022/0.75	0.75m
HQSS1022/1.5	1.5m
HQSS1022/2.5	2.5m
HQSS1022/5	5m
HQSS1022/10	10m