



- AC 750**
Next Generation Wi-Fi
- 2.4GHz / 5GHz**
Dual-Band
- Smart Setup,
No CD Required
- iQoS**
Bandwidth Management

BR-6208AC


AC750 Multi-Function Concurrent Dual-Band Wi-Fi Router

The extraordinary growth in the number of wireless devices found in modern homes has seen a huge increase in demand for wireless speed, range and bandwidth. This continuing trend away from wired connections to wireless communication and the ever-increasing throughput demands of new Wi-Fi devices and applications—including Internet TVs, computers, tablets and smartphones—drives the requirements in today’s homes for high-performance, reliable Wi-Fi to unprecedented levels. To meet the connectivity needs of homes and businesses alike, Edimax has launched the BR-6208AC dual-band 802.11ac router: featuring the latest 11ac standard for extraordinary improvements in the speed, reliability and quality of wireless communications.

Next-Generation Wireless Networking

The Edimax BR-6208AC router supports the next generation IEEE 802.11ac wireless standard, meaning higher data rates in the 5GHz band. With 300Mbps speeds in the 2.4GHz band and 433Mbps speeds in 5GHz, the BR-6208AC is ideal for HD video streaming and large file transfers. The router is also backward compatible with 802.11a/b/g/n to ensure compatibility with legacy Wi-Fi devices.

Maximum Speed: Next Generation 802.11ac vs. 802.11n

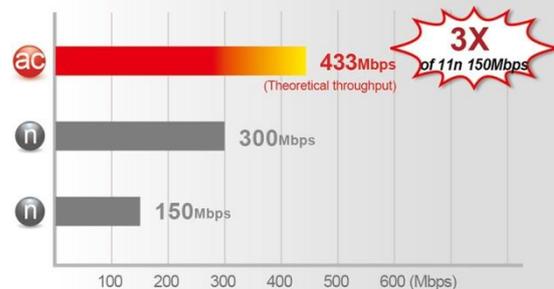

Concurrent Dual-Band Wi-Fi Connectivity

The Edimax BR-6208AC router provides simultaneous 2.4GHz (802.11n) and 5GHz (802.11ac) wireless network connectivity for maximum flexibility of use.

5GHz (Up to 433Mbps)
Interference-Free
HD Video and Gaming

Online Gaming HD Video Streaming VoIP Calling

2.4GHz (Up to 300Mbps)
More Supported Devices
Basic Internet Applications

Web Browsing Online Chat Email and downloading


Concurrent Dual-Band

AC750: 433Mbps(5GHz) + 300Mbps(2.4GHz)

AC750 Multi-Function Concurrent Dual-Band Wi-Fi Router

BR-6208AC

5GHz Wi-Fi
2.4GHz Wi-Fi

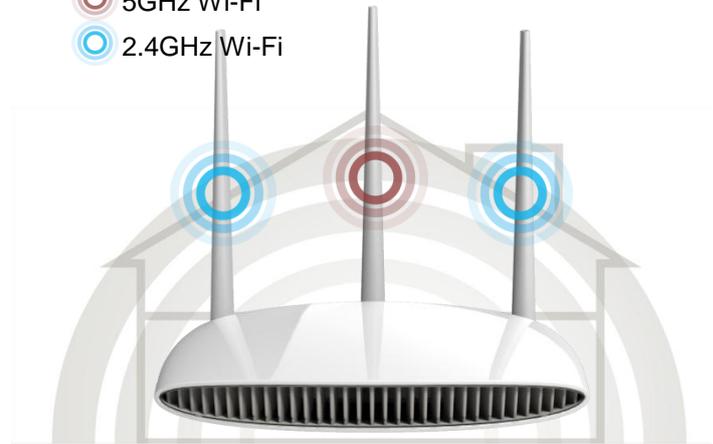

Three Antennas For Better Wi-Fi Performance

Employing three external fixed antennas, the BR-6208AC provides powerful 2.4GHz and 5GHz dual-band signal strength and enhances Wi-Fi range, providing signal penetration through walls and floors across your home or office.

5-in-1 Router, Access Point, Range Extender, Wireless Bridge and WISP

The BR-6208AC can work as router, access point, range extender, wireless bridge or WISP. Just configure the mode you need for your network environment using the smart iQ Setup wizard.




Switch mode using the smart iQ setup wizard on any device with a web browser, no CD required.

**Mobile device setup requires iOS 4.0 or Android 4.0 and above.*

Smart iQ Setup

Features iQ Setup for smart, automatic and quick installation with no CD required.

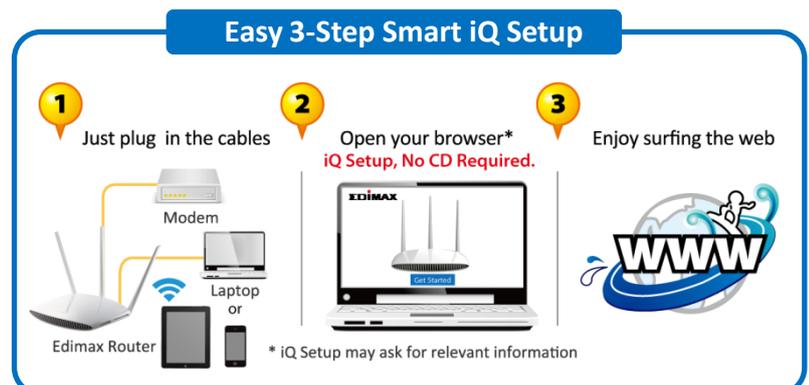


AC750 Multi-Function Concurrent Dual-Band Wi-Fi Router

BR-6208AC

Edimax's Revolutionary iQoS


iQoS is Edimax's solution for a quicker, easier, and more effective way to manage Internet bandwidth. While Quality of Service (QoS) functionality is a common feature in routers across the market, typically only advanced users have the knowledge required to set up the complex parameters. Edimax though has redesigned QoS with user-friendliness and accessibility in mind. A simple and intuitive user interface allows users to arrange bandwidth priority settings in just a few clicks. With iQoS, you can enjoy gaming, video streaming, VoIP applications and BT clients at the same time without the usual nightmare of lag and interruptions. An original, efficient and effective means of managing your Internet bandwidth.

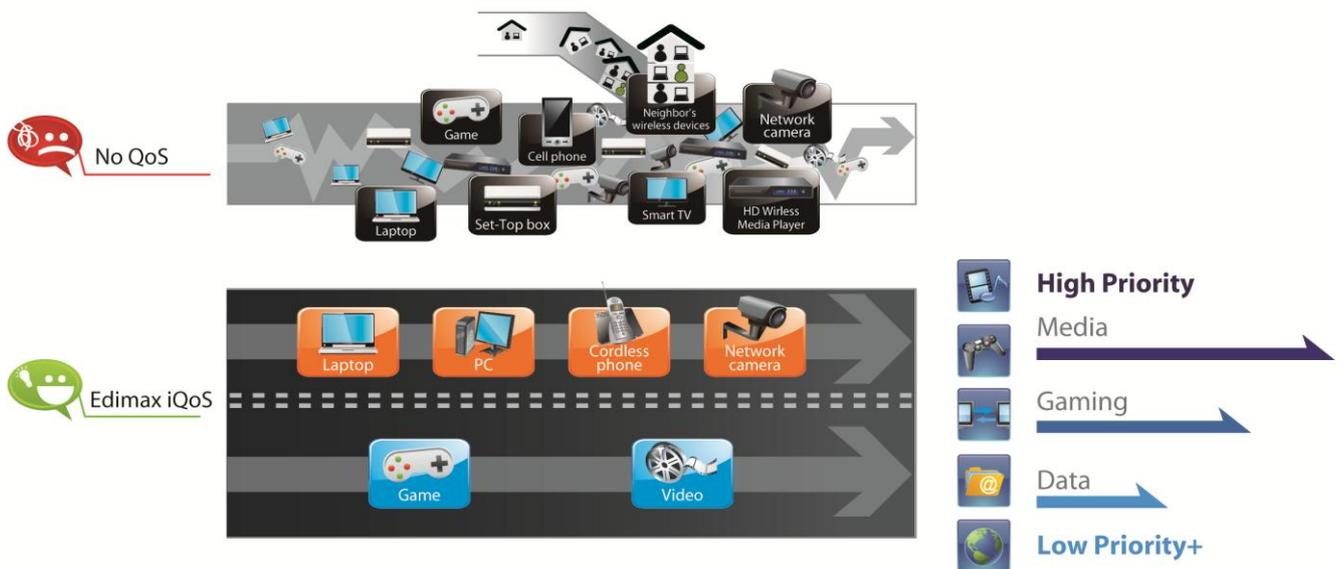

Multi-SSID & VLAN Support*

Multi-SSID enables users to configure up to eight separate SSIDs (2.4GHz x 4 and 5GHz x 4) in order to group and manage users according to your requirements. In addition, each SSID can be assigned a different VLAN ID, so users with multiple VLANs can manage the network access level of each SSID – ensuring security and protecting confidential or critical network resources.

*Access point mode only

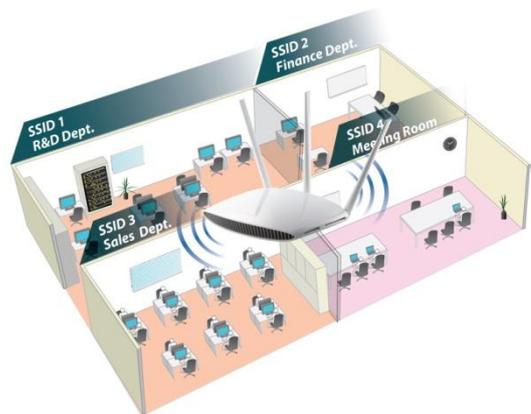

Guest Network*

Supports a guest network to provide connectivity while isolating guests from your primary network.

*Router mode only




AC750 Multi-Function Concurrent Dual-Band Wi-Fi Router

BR-6208AC

TECHNICAL SPECIFICATIONS

FUNCTIONS	HARDWARE INTERFACE	MANAGEMENT & INSTALLATION
<ul style="list-style-type: none"> Supports router, access point, range extender, wireless bridge and WISP modes Guest network Up to 8 SSIDs (2.4GHz x 4 and 5GHz x 4) with VLAN support in AP mode IGMP proxy and IGMP snooping DDNS and DHCP Port triggering for special applications Virtual server and DMZ hosting MAC/IP filter and URL blocking iQoS for smart bandwidth management Static routing UPnP architecture VPN pass-through (IPSec/PPTP) Wi-Fi schedule control Fault tolerance firmware upgrade 	<ul style="list-style-type: none"> 1 x RJ-45 10/100M WAN port 4 x RJ-45 10/100M LAN port LED indicators: Power, Internet, 2.4GHz wireless, 5GHz wireless 2 x 2.4GHz antennas and 1 x 5GHz antenna WPS/Reset button Wireless on/off switch 	<ul style="list-style-type: none"> Multi-language user interface Supports remote management System status and security log Firmware upgradable Smart iQ Setup, no CD required Supports smartphone, tablet or laptop setup (iOS 4 or Android 4 and above are required for smartphone or tablet setup).
WAN	OUTPUT POWER & SENSITIVITY GAIN (5GHz)	OUTPUT POWER & SENSITIVITY GAIN (2.4GHz)
<ul style="list-style-type: none"> Supports WISP connection mode Supports RJ-45 cable/xDSL modems WAN protocol: PPPoE, static IP, dynamic IP, PPTP and L2TP 	<p>Output Power</p> <ul style="list-style-type: none"> 11a(54Mbps): 16±1.5dBm 11n(20MHz, MCS7): 16±1.5dBm 11n(40MHz, MCS7): 16±1.5dBm 11ac(80MHz, MCS9): 14±1.5dBm <p>Receive Sensitivity</p> <ul style="list-style-type: none"> 11a(54Mbps): -69±2dBm 11n(20MHz, MCS7): -68±2dBm 11n(40MHz, MCS7): -64±2dBm 11ac(80MHz, MCS9): -57±2dBm 	<p>Output Power</p> <ul style="list-style-type: none"> 11b (11Mbps): 18±1.5dBm 11g (54Mbps): 17±1.5dBm 11n (20MHz, MCS7): 16±1.5dBm 11n (40MHz, MCS7): 16±1.5dBm <p>Receive Sensitivity</p> <ul style="list-style-type: none"> 11b(11Mbps): -83±2dBm 11g (54Mbps): -69±2dBm 11n(20MHz, MCS7): -67±2dBm 11n(40MHz, MCS7): -64±2dBm
SECURITY	MEMORY	HUMIDITY & TEMPERATURE
<ul style="list-style-type: none"> 64/128-bit WEP, WPA and WPA2 security QoS for critical operations SPI anti-DoS firewall 	<ul style="list-style-type: none"> 4MB Flash 64MB RAM 	<ul style="list-style-type: none"> 10-90% (non-condensing) 0-40°C
POWER ADAPTER	DIMENSIONS & WEIGHTS	CERTIFICATIONS
<ul style="list-style-type: none"> DC 5V, 1.5A 	<ul style="list-style-type: none"> 190.2mm x 141mm x 42mm 260g 	<ul style="list-style-type: none"> FCC/CE

HARDWARE INTERFACE

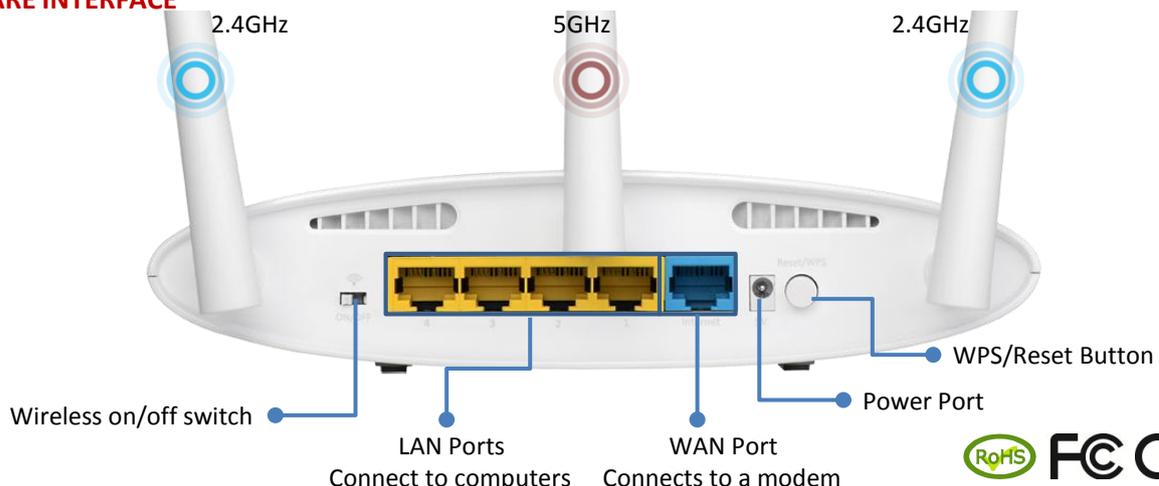


Connect to computers Connects to a modem

AC750 Multi-Function Concurrent Dual-Band Wi-Fi Router

BR-6208AC

APPLICATION DIAGRAM

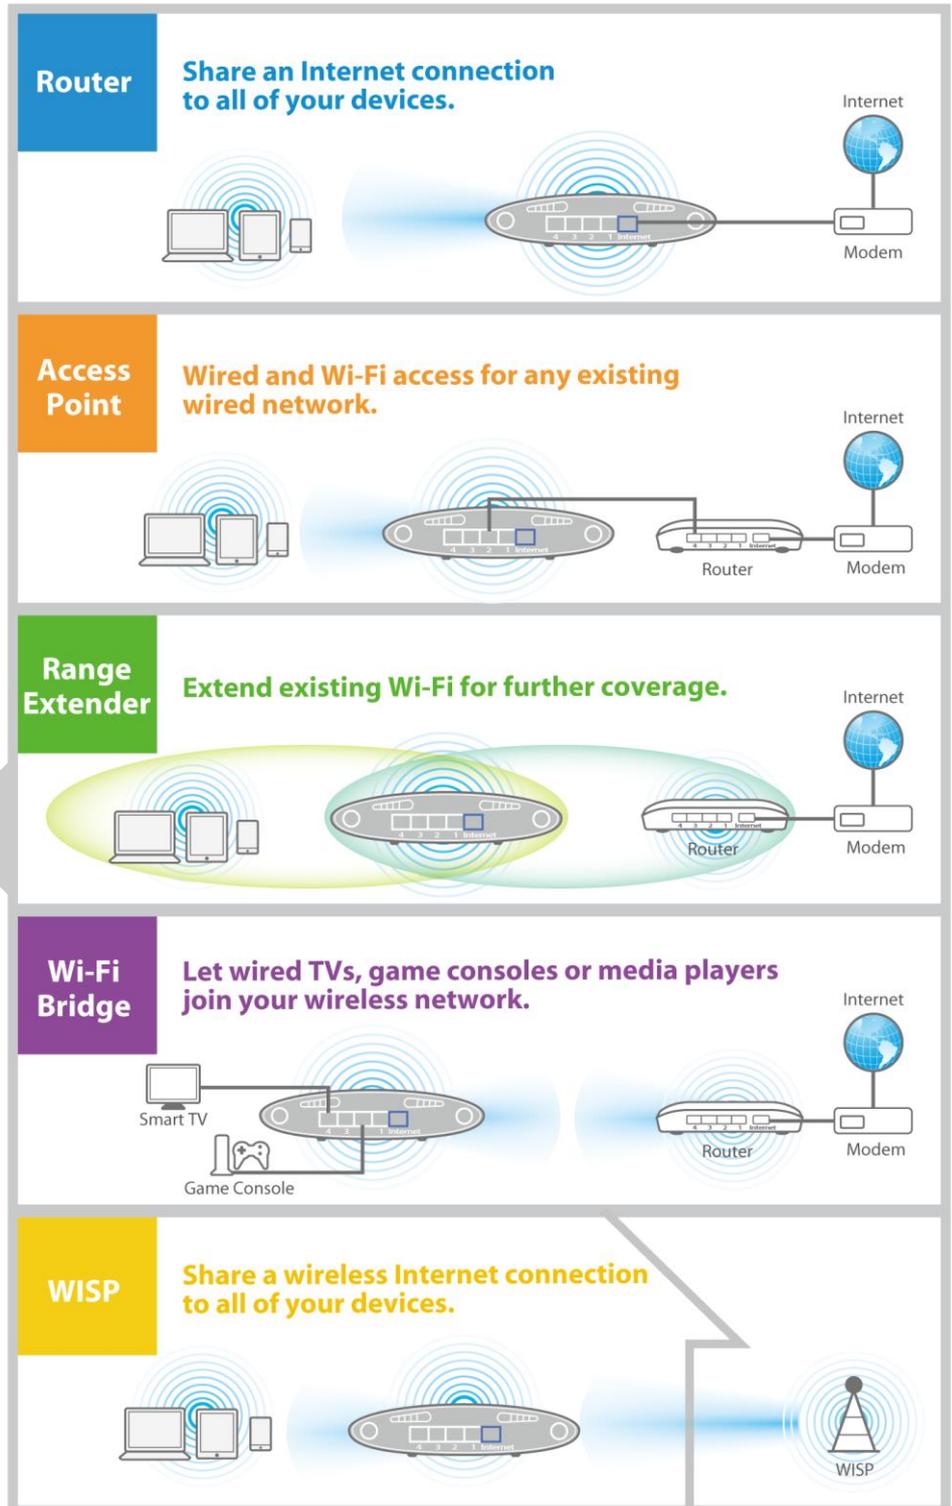

Maximum performance, actual data rates, and coverage will vary depending on network conditions and environmental factors. Product specifications and design are subject to change without notice.
Copyright © 2014 Edimax Technology Co. Ltd. All rights reserved. www.edimax.com