


CS52A

2-Port Hybrid™ KVM Switch with Audio

Diagram

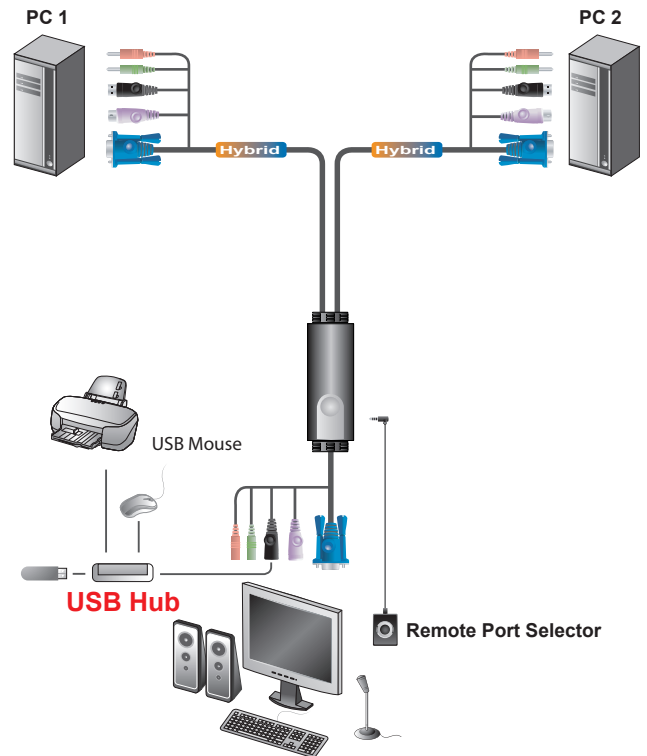

	Console PS/2, USB		Computers PS/2, USB		OS Support Win, Linux, FreeBSD
	Multi-function mice		Audio Mic. & Speaker		Non-Powered

Features

- One console (monitor, PS/2 keyboard, and USB mouse) controls two computers
- Remote Port Selector for convenient switch placement
- Supports multi-function mice
- USB 2.0 mouse port can be used for USB hub and USB peripheral sharing
- Compact design, built in all-in-one cables (console 0.15m; computers 0.6m, 1.2m)
- Audio (microphone and speaker) enabled -full bass response provides a rich experience for 2.1 surround sound systems
- Independent switching of the KVM and Audio focus - one computer can have the KVM focus while the other has the audio focus
- Superior video quality- up to 2048 x 1536; DDC2B
- Auto Scan function to monitor computer operation
- Non-powered

Specifications

Function		CS52A
Computer Connections		2
Port Selection		Hotkey, Pushbutton
Connectors	Console Ports	Keyboard 1 x 6-pin Mini-DIN Female (Purple)
		Video 1 x HDB-15 Female (Blue)
		Mouse 1 x USB Type A Female (Black)
		Speaker 1 x Mini Stereo Jack Female (Green)
		Microphone 1 x Mini Stereo Jack Female (Pink)
	KVM Ports	Keyboard 2 x 6-pin Mini-DIN Male (Purple)
		Video 2 x HDB-15 Male (Blue)
		Mouse 2 x USB Type A Male (Black)
		Speaker 2 x Mini Stereo Plug Male (Green)
		Microphone 2 x Mini Stereo Plug Male (Pink)
Switches	Remote Port Selector 1 x Mini Stereo Jack	
	Port 1 x Pushbutton	
LEDs		Selected 2 (Green)
Cable		Console 0.15m
Length		Computers 0.6m, 1.2m
Emulation		Keyboard PS/2
Video		2048 x 1536; DDC2B
Scan Interval		3, 5, 10, 20 Seconds
Environment	Operating Temp. 0-50° C	
	Storage Temp. -20-60° C	
	Humidity 0 - 80% RH, Non-condensing	
Physical Properties	Housing Plastic	
	Weight 0.41 kg	
	Dimensions (L x W x H) 8.45 x 3.40 x 2.13 cm	

* The specifications and pictures are subject to change without notice.