


- .Digital-Ready Broadband
- 5-1000MHz frequency range
- .High Quality Zinc Diecast Case
- .Solder back conver EMI -RFI>-80dB



Technical specifications T Y P E		FC-3SPLT-KN
Insertion loss(IN-OUT)	5-47MHz	7db
	47-470MHz	7db
	470-862MHz	7db
	862-1000MHz	7db
Isolation(OUT-OUT)	5-47MHz	22dB
	47-470MHz	22dB
	470-862MHz	22dB
	862-1000MHz	22dB
Return loss	5-47MHz	18dB
	47-470MHz	20dB
	470-862MHz	20dB
	862-1000MHz	18dB

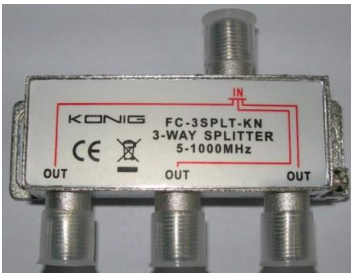