


Sehr kleine 13 mm (0,5") Hochttonkalotte mit Polycarbonat-Membran, ferrofluidge-
kühlter Schwingspule und sehr linearem Frequenzgang. Spritzige Höhen, hervorragendes
Rundstrahlverhalten. Für den Einsatz in 2- oder 3-Wege-Systemen kleiner und mittlerer Leistung
oder als Zusatzhochtoner; Einbau- oder Aufbaumontage möglich, insbesondere dort, wo wenig
Platz zur Verfügung steht (z. B. Spiegeldreieck, Türgriff).



Zubehör: Inklusive Montagering zum Einbau und Anschlusskabel.

Very compact 13 mm (0.5") ferro-fluid cooled tweeter with a polycarbonate cone, featuring an
absolutely linear frequency response. Crisp high-range reproduction and excellent omnidirectional
sound distribution. Tweeter in low to medium-output 2- or 3-way systems or as an additional tweeter.
Can be surface or flush mounted. Especially suitable for mounting in confined spaces (e.g. mirror
vicinity and door handles).

Accessories: Mounting ring and connecting cables included.

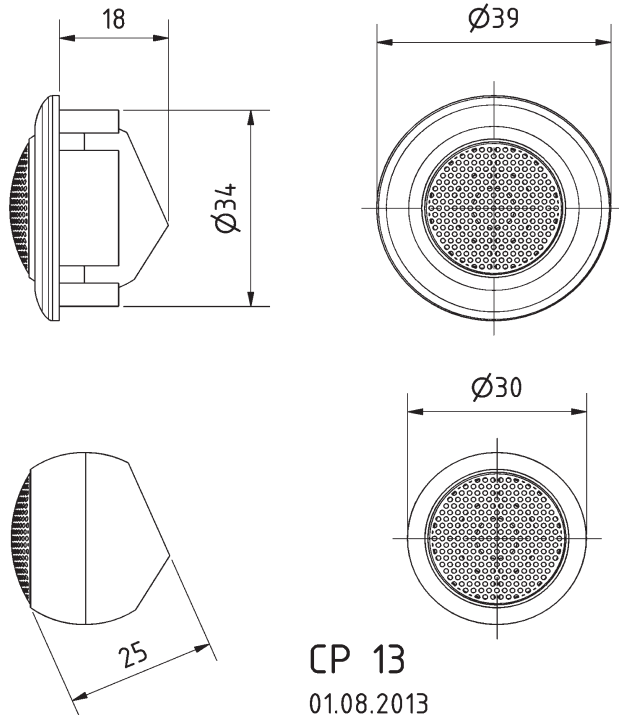

CP 13 - 4 Ohm

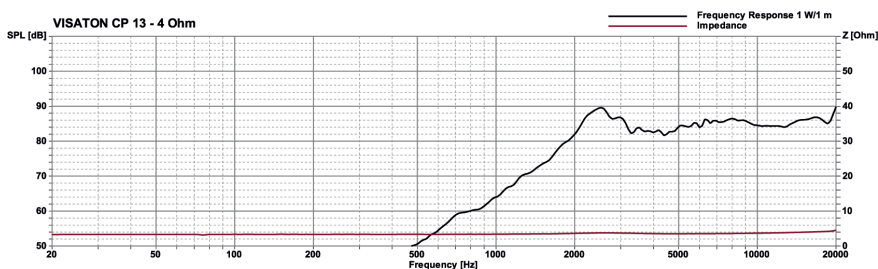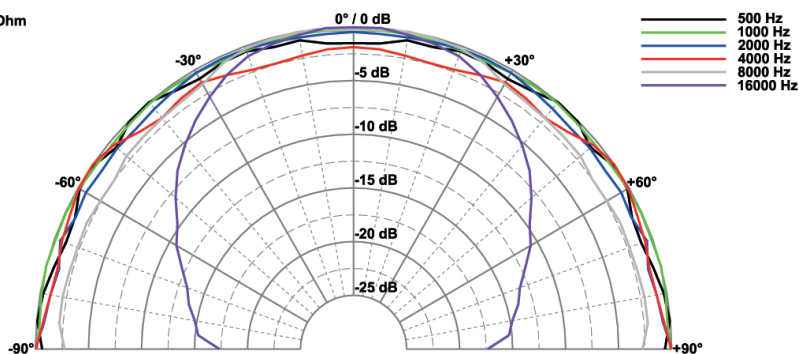

Technische Daten / Technical Data

Nennbelastbarkeit	
Rated power	60 ¹ W
Musikbelastbarkeit	
Maximum power	100 ¹ W
Impedanz	
Impedance	4 Ω
Übertragungsbereich (-10 dB)	
Frequency response (-10 dB)	1700–22000 Hz
Mittlerer Schalldruckpegel	
Mean sound pressure level	86 dB (1 W/1 m)
Resonanzfrequenz	
Resonant frequency	2400 Hz
Schwingspulendurchmesser	
Voice coil diameter	13 mm Ø
Wickelhöhe	
Height of winding	1,5 mm
Schallwandöffnung	
Cut-out diameter	33,5 mm Ø
Gewicht netto	
Net weight	0,026 kg

¹ über Frequenzweiche 12 dB/Okt. ab mind. 6000 Hz /
via crossover network 12 dB/Oct. as of 6000 Hz