

LED PIPE


LED PIPE G2 L300 WW

0051026



Product features

- LED T5 replacement batten, seamless linking (up to 10M), Ideal for direct lighting such as under cabinet or in kitchens, 150 degree beam angle, includes switch, includes 0.30m stripped cable, white polycarbonate body, includes standard and tilting brackets



PRODUCT OVERVIEW

Product name	LED PIPE G2 L300 WW
Technology	LED
Housing	PC Polycarbonate
General application	Residential & Consumer,
ETIM Class	EC000109
E-number FI	4170534
E-number SE	7505138
Warranty	3 years
Fixture luminous flux (lm)	360
Luminaire efficacy (lm/W)	90
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	150
Photobiological Risk Group	RG0
Total power consumption (W)	4
Product Voltage (V)	70
Electrical protection	Class II
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288510262
Light source included	SAX0000A_0000

DATA TABLE

General data

Product name	LED PIPE G2 L300 WW
Technology	LED
Housing	PC Polycarbonate
General application	Residential & Consumer,

LED PIPE

LED PIPE G2 L300 WW

0051026

Operating temperature range (°C)	-20°C - 40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000109
E-number FI	4170534
E-number SE	7505138
Warranty	3 years

Optical data

Fixture luminous flux (lm)	360
Luminaire efficacy (lm/W)	90
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	150
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	4
Mains voltage (V)	220-240V~
Product Voltage (V)	70
Lamp power factor	0.9
Electrical protection	Class II
Dimmable	No
Drive current (mA)	50
Inrush Current (A)	2
Inrush Duration (µs)	50
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	25
Max. Luminaires per 13A C Breaker	32
Max. Luminaires per 16A C Breaker	40
Max. Luminaires per 20A C Breaker	45
Max. Luminaires per 10A B Breaker	15
Max. Luminaires per 13A B Breaker	19
Max. Luminaires per 16A B Breaker	24
Max. Luminaires per 20A B Breaker	30

Lifetime data

Lifespan L70 B50	30000
------------------	-------

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	300
Nominal Product Width (mm)	24
Nominal Product Height (mm)	35

LED PIPE

LED PIPE G2 L300 WW
0051026

Weight (kg) 0.129


Packaging

Single packaging type	Carton
Product EAN number	5410288510262
Packaging single length / height (cm)	4.1
Packaging single width (cm)	3.2
Packaging single depth (cm)	42.0
DUN14 (outer)	15410288510269
Units per outer package	20
Packaging outer length / height (cm)	44.0
Packaging outer width (cm)	18.5
Packaging outer depth (cm)	19.0

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

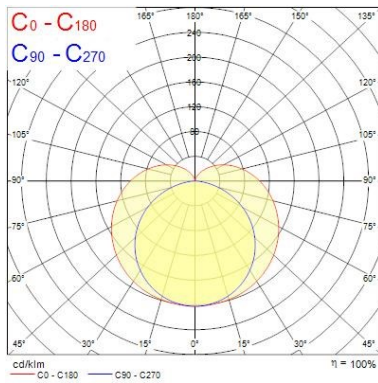

TECHNICAL DRAWINGS

