

LED PIPE


LED PIPE G2 L1200 NW

0051034



Product features

- LED T5 replacement batten, seamless linking (up to 10M), Ideal for direct lighting such as under cabinet or in kitchens, 150 degree beam angle, includes switch, includes 0.30m stripped cable, white polycarbonate body, includes standard and tilting brackets



PRODUCT OVERVIEW

Product name	LED PIPE G2 L1200 NW
Technology	LED
Housing	PC Polycarbonate
General application	Residential & Consumer,
ETIM Class	EC000109
E-number FI	4170542
E-number SE	7505146
Warranty	3 years
Fixture luminous flux (lm)	1300
Luminaire efficacy (lm/W)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	150
Photobiological Risk Group	RG0
Total power consumption (W)	13
Product Voltage (V)	100
Electrical protection	Class II
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288510347
Light source included	SAX0000A_0000

DATA TABLE

General data

Product name	LED PIPE G2 L1200 NW
Technology	LED
Housing	PC Polycarbonate
General application	Residential & Consumer,

LED PIPE

LED PIPE G2 L1200 NW

0051034

Operating temperature range (°C)	-20°C - 40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000109
E-number FI	4170542
E-number SE	7505146
Warranty	3 years

Optical data

Fixture luminous flux (lm)	1300
Luminaire efficacy (lm/W)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	150
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	13
Mains voltage (V)	220-240V~
Product Voltage (V)	100
Lamp power factor	0.9
Electrical protection	Class II
Dimmable	No
Drive current (mA)	105
Inrush Current (A)	2
Inrush Duration (µs)	50
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	15
Max. Luminaires per 13A C Breaker	15
Max. Luminaires per 16A C Breaker	15
Max. Luminaires per 20A C Breaker	15
Max. Luminaires per 10A B Breaker	10
Max. Luminaires per 13A B Breaker	13
Max. Luminaires per 16A B Breaker	15
Max. Luminaires per 20A B Breaker	15

Lifetime data

Lifespan L70 B50	30000
------------------	-------

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1200
Nominal Product Width (mm)	24
Nominal Product Height (mm)	35

LED PIPE LED PIPE G2 L1200 NW 0051034

Weight (kg) 0.277


Packaging

Single packaging type	Carton
Product EAN number	5410288510347
Packaging single length / height (cm)	4.1
Packaging single width (cm)	3.2
Packaging single depth (cm)	132.0
DUN14 (outer)	15410288510344
Units per outer package	20
Packaging outer length / height (cm)	134.0
Packaging outer width (cm)	18.5
Packaging outer depth (cm)	19.0

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

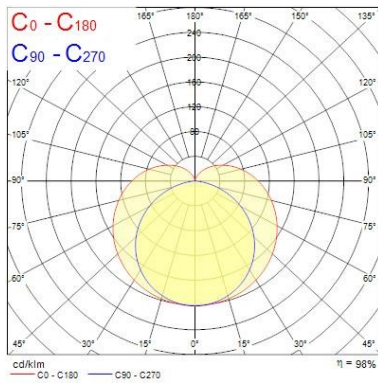

TECHNICAL DRAWINGS

