


## Gizmo Solar Wall Light Lantern

GIZMO SOLAR WALL LIGHT LANTERN  
0054040



### Product features

- Outdoor solar wall light in vintage design and black finish
- Integrated PIR sensor and daylight sensors
- Automatic light management - light up automatically when it gets dark after detecting any motion
- Easy installation - no direct mains wiring or connection required
- High lumen output - 345lm
- Long rated lifetime - 20,000 hours
- ON/OFF switch
- Robust construction - ABS housing and aluminium mounting bracket
- Perfect for porch, garage, sheds, outhouses, outdoor office, garden fence, gate lighting
- Colour temperature - Cool White 4000K
- Fixing kit included
- Operating temperature: -10°C to 40°C

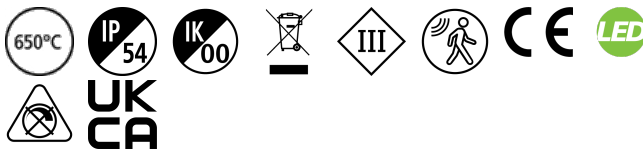

### PRODUCT OVERVIEW

|                                 |                                |
|---------------------------------|--------------------------------|
| Product name                    | GIZMO SOLAR WALL LIGHT LANTERN |
| Technology                      | LED                            |
| Cap/Base                        | N/A                            |
| Housing                         | ABS Plastic                    |
| Mount                           | Wall surface mounted           |
| General application             | Residential & Consumer         |
| ETIM Class                      | N/A                            |
| Warranty                        | 3 years                        |
| Fixture luminous flux (lm)      | 345                            |
| Luminaire efficacy (lm/W)       | 77                             |
| Colour temperature (K)          | 4000                           |
| Light colour                    | Cool White                     |
| CRI (Ra)                        | 80                             |
| Colour Variation Initial (SDCM) | SDCM6                          |
| Photobiological Risk Group      | RG1                            |
| Electrical protection           | Class III                      |
| Control gear type               | LED driver constant current    |
| Dimmable                        | No                             |
| Housing colour                  | Black                          |
| IP rating                       | IP54                           |
| IK rating                       | IK00                           |
| Product EAN number              | 5410288540405                  |
| Light source included           | INTEGRATED LED                 |

### DATA TABLE

## Gizmo Solar Wall Light Lantern

*GIZMO SOLAR WALL LIGHT LANTERN*  
0054040

### General data

|                                  |                                |
|----------------------------------|--------------------------------|
| Product name                     | GIZMO SOLAR WALL LIGHT LANTERN |
| Technology                       | LED                            |
| Cap/Base                         | N/A                            |
| Housing                          | ABS Plastic                    |
| Mount                            | Wall surface mounted           |
| General application              | Residential & Consumer         |
| Operating temperature range (°C) | -10°C - 40°C                   |
| ETIM Class                       | N/A                            |
| Warranty                         | 3 years                        |

### Optical data

|                                 |            |
|---------------------------------|------------|
| Fixture luminous flux (lm)      | 345        |
| Luminaire efficacy (lm/W)       | 77         |
| Colour temperature (K)          | 4000       |
| Light colour                    | Cool White |
| CRI (Ra)                        | 80         |
| Colour Variation Initial (SDCM) | SDCM6      |
| Distribution type               | None       |
| Photobiological Risk Group      | RG1        |

### Electrical data

|                        |                             |
|------------------------|-----------------------------|
| Mains voltage (V)      | 5V                          |
| Electrical protection  | Class III                   |
| Control gear type      | LED driver constant current |
| Dimmable               | No                          |
| Drive current (mA)     | 1300                        |
| Glow Wire Test (°C)    | 650                         |
| Nominal Frequency (Hz) | N/A                         |

### Lifetime data

|                  |        |
|------------------|--------|
| Lifespan L70 B50 | 100000 |
|------------------|--------|

### Physical data

|                             |             |
|-----------------------------|-------------|
| Housing colour              | Black       |
| IP rating                   | IP54        |
| IK rating                   | IK00        |
| Diffuser finish             | Transparent |
| Diffuser material           | Other       |
| Reflector finish            | None        |
| Nominal Product Length (mm) | 203         |
| Nominal Product Width (mm)  | 182         |
| Nominal Product Height (mm) | 340         |
| Weight (kg)                 | 1.01        |

### Packaging

|                                       |               |
|---------------------------------------|---------------|
| Single packaging type                 | Carton        |
| Product EAN number                    | 5410288540405 |
| Packaging single length / height (cm) | 24.0          |

## Gizmo Solar Wall Light Lantern

*GIZMO SOLAR WALL LIGHT LANTERN*  
0054040

---

|                                      |                |
|--------------------------------------|----------------|
| Packaging single width (cm)          | 20.0           |
| Packaging single depth (cm)          | 35.0           |
| DUN14 (outer)                        | 15410288540402 |
| Units per outer package              | 6              |
| Packaging outer length / height (cm) | 62.0           |
| Packaging outer width (cm)           | 49.5           |
| Packaging outer depth (cm)           | 37.0           |

### Safety data

|                                  |        |
|----------------------------------|--------|
| Optimal operating condition (°C) | -10-40 |
|----------------------------------|--------|