

EN-9320TX-E V2 e EN-9225TX-E

Guida di installazione rapida

02-2020 / v1.0

Edimax Technology Co., Ltd.

No. 278, Xinhua 1st Rd., Neihu Dist., Taipei City, Taiwan

Email: support@edimax.com.tw

Edimax Technology Europe B.V.

Fijenhof 2, 5652 AE Eindhoven, The Netherlands

Email: support@edimax.nl

Edimax Computer Company

3444 De La Cruz Blvd., Santa Clara, CA 95054, USA

Email: support@edimax.com

Sommario

I. Informazioni sul prodotto..... 1

I-1. Contenuti della confezione 2

I-2. Supporto driver / Requisiti di sistema..... 3

I-3. Indicatore LED..... 3

I-4. Panoramica Hardware 4

II. Installazione hardware 5

III. Installare il driver..... 7

III-1. Installazione del driver 7

III-2. Disinstallazione del driver 8

I. Informazioni sul prodotto

Le due Schede di rete iper veloci EN-9320TX-E V2 da 10G ed EN-9225TX da 2,5G-E di Edimax assicurano ciascuno a ritroso con la vostra infrastruttura di rete.

La scheda di rete 10G EN-9320TX-E V2 fornisce e supporta una velocità di 10G con la compatibilità a ritroso con gli standard di rete 10 GbE, 5 GbE, 2,5 GbE, 1 GbE e 100 MbE, che assicura una velocità di fino a 10 Gbps, 10 volte superiore rispetto allo standard gigabit Ethernet. L'altra Scheda di rete EN-9225TX-E da 2,5 G a 3 velocità supporta gli standard di rete 2,5 GbE, 1 GbE e 100MbE.

Inoltre, entrambe le schede di rete supportano la tecnologia QoS che aiuta a migliorare le capacità di gestione del traffico Internet del router grazie a una più efficiente allocazione della larghezza di banda.

Tutti i documenti di supporto sono consultabili sul sito web di Edimax cliccando sul link riportato di seguito oppure utilizzando il codice QR:

<https://www.edimax.com/download>



(Una volta entrati nel sito web ufficiale di Edimax, inserire il numero di modello "EN-9320TX-E V2" o "EN-9225TX-E" nell'apposita casella di ricerca per trovare il proprio prodotto.)

Download

To select your product and find related download materials, enter the model number into the search box on the right side or follow the simple steps below:

*Feel free to contact us anytime if you need help or if you can't find your product.


Model no.



How do I find the model number?


I-1. Contenuti della confezione

Fare riferimento al proprio prodotto per le figure riportate di seguito,




EN-9320TX-E V2

or



EN-9225TX-E



Staffa a basso profilo



Guid

I-2. Supporto driver / Requisiti di sistema

EN-9320TX-E V2:

- Windows 7, 8, 8.1, 10 (a 32/64 bit)
- Supporto dei kernel Linux 3.0~ 4.9

EN-9225TX-E:

- Windows 7, 8, 8.1, 10 (a 32/64 bit)
- Supporto dei kernel Linux 3.1, 3.12, 3.2, 4.2, 4.4

I-3. Indicatore LED

EN-9320TX-E V2:


Colore	LED di stato	Descrizione
Giallo	Acceso	5 Gbps / 2,5 Gbps / 1 Gbps / 100 Mbps
Verde	Acceso	- 10 Gbps - Nessuna trasmissione di dati
	Lampeggiante	Luce verde lampeggiante durante la trasmissione dei dati

EN-9225TX-E

Colore	LED di stato	Descrizione
Giallo	Acceso	1 Gbps / 100 Mbps
Verde	Acceso	- 2,5 Gbps - Nessuna trasmissione di dati
	Lampeggiante	Luce verde lampeggiante durante la trasmissione dei dati

I-4. Panoramica Hardware

EN-9320TX-E V2 & EN-9225TX-E:

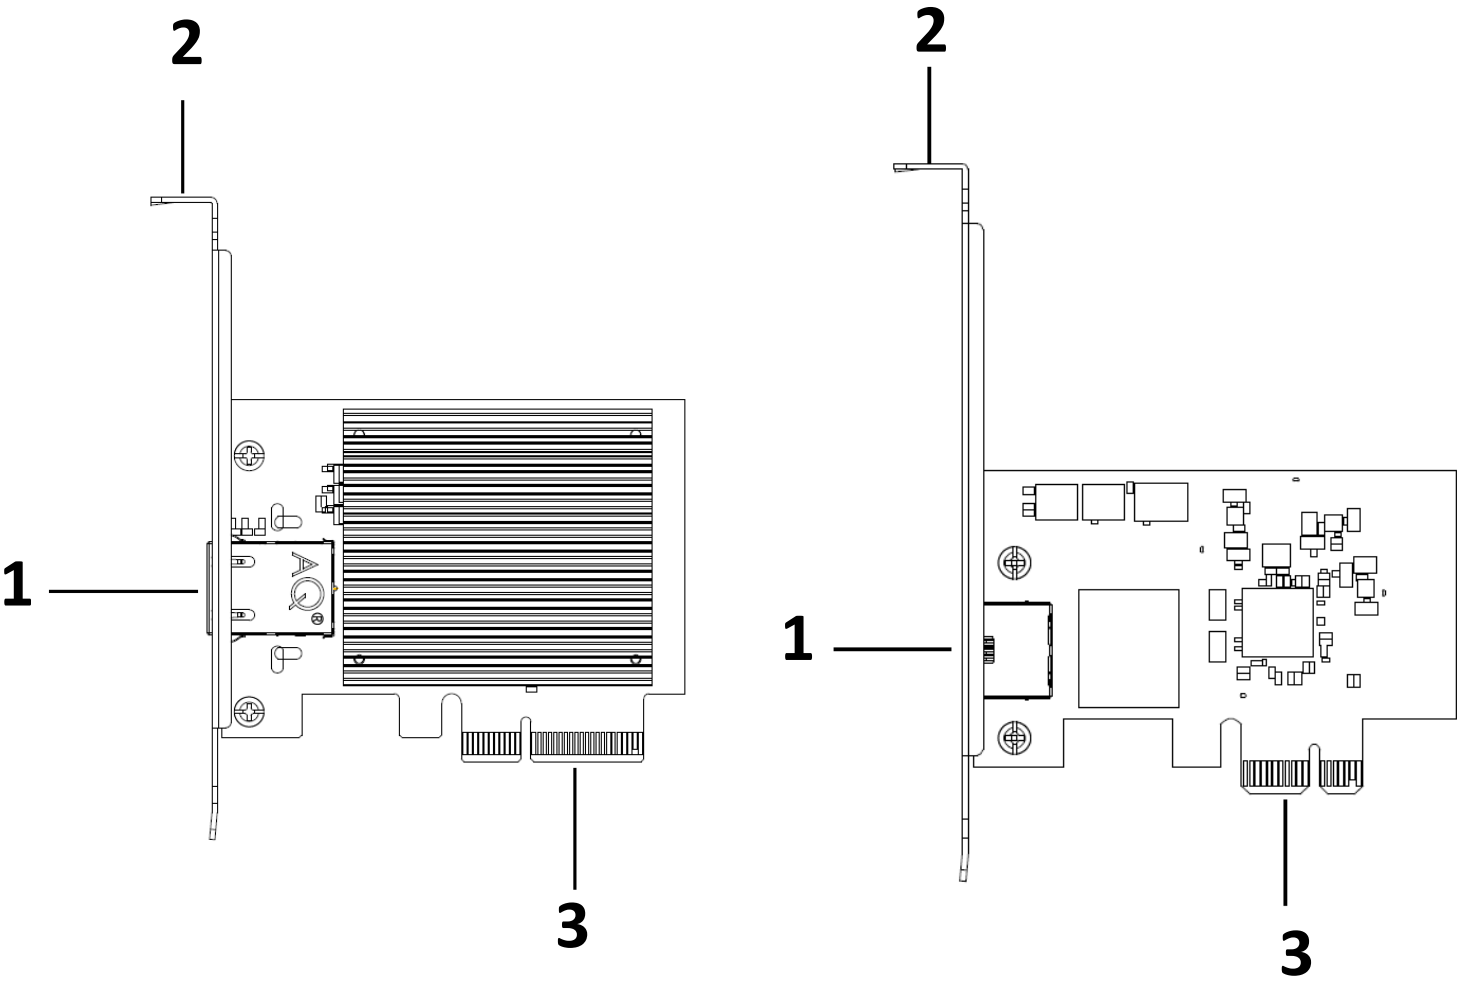


No.	Descrizione
1	Porta RJ-45
2	Profilo PCIe standard
3	PCI-E (EN-9320TX-E V2 X1/EN-9225TX-E X4)


II. Installazione hardware

Invitiamo a seguire le istruzioni qui riportate per installare l'adattatore di rete sul PC,

1. Spegnere il PC e scollegare il cavo di alimentazione.
2. Rimuovere il pannello laterale del computer togliendo le viti e identificare lo slot PCI-E vuoto.

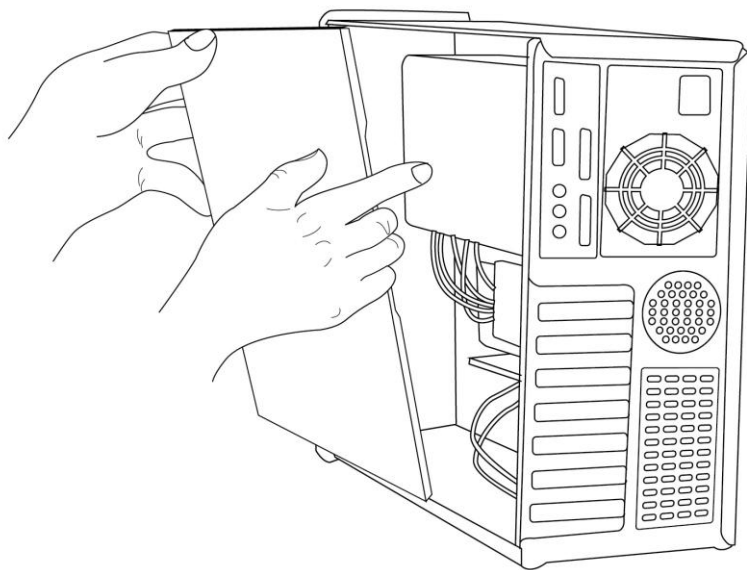

3. Installare la scheda inserendola con decisione nello slot d'espansione.

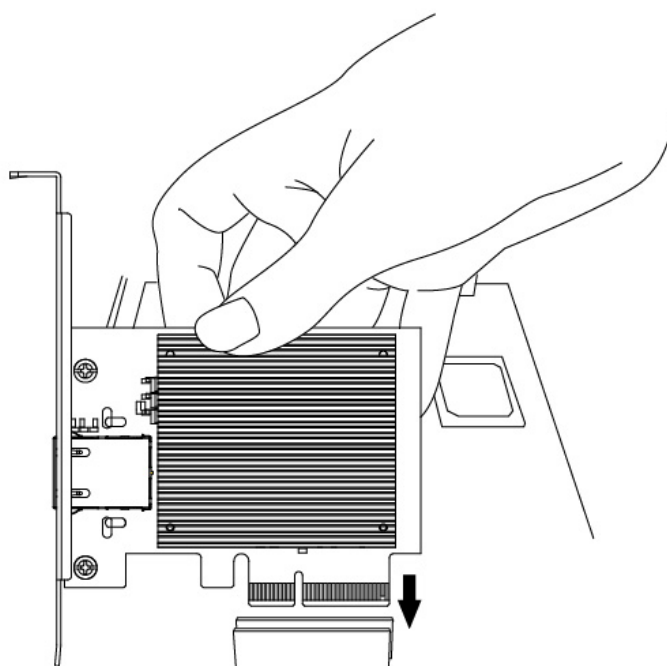

4. Riposizionare il pannello laterale e ricollegare il cavo di alimentazione



III. Installare il driver

Invitiamo a seguire le istruzioni qui riportate per installare e disinstallare il driver.

III-1. Installazione del driver


Tutti i driver sono reperibili sul sito web di Edimax all'indirizzo riportato di seguito oppure accessibile mediante il codice QR:

<https://www.edimax.com/download>



(Una volta visitato il sito web ufficiale di Edimax, inserisci il numero di modello “EN-9320TX-E V2 or EN-9225TX-E” nell’apposita casella di ricerca per trovare il tuo prodotto.)

Fare clic sul pulsante di download per accedere alla pagina di download:

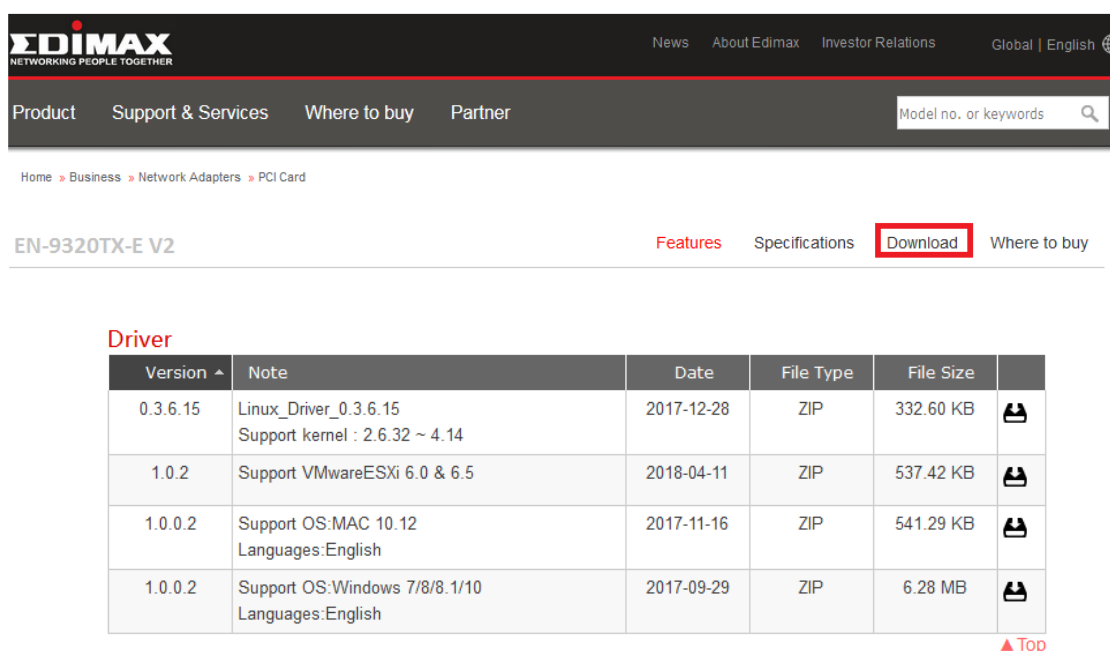

The screenshot shows the Edimax website interface. At the top, there is a navigation bar with links for News, About Edimax, Investor Relations, and Global | English. Below this is a secondary navigation bar with links for Product, Support & Services, Where to buy, and Partner. A search bar is located on the right side of this bar. The main content area displays the product name "EN-9320TX-E V2" and a breadcrumb trail: Home > Business > Network Adapters > PCI Card. Below the product name, there are tabs for Features, Specifications, Download (highlighted with a red box), and Where to buy. The "Driver" section is expanded, showing a table of available drivers.


Version ^	Note	Date	File Type	File Size	
0.3.6.15	Linux_Driver_0.3.6.15 Support kernel : 2.6.32 ~ 4.14	2017-12-28	ZIP	332.60 KB	
1.0.2	Support VMwareESXi 6.0 & 6.5	2018-04-11	ZIP	537.42 KB	
1.0.0.2	Support OS:MAC 10.12 Languages:English	2017-11-16	ZIP	541.29 KB	
1.0.0.2	Support OS:Windows 7/8/8.1/10 Languages:English	2017-09-29	ZIP	6.28 MB	

▲ Top

III-2. Disinstallazione del driver


Per Windows 10:

1. Aprire il pannello di controllo dal menu di avvio o mediante la funzione di ricerca.

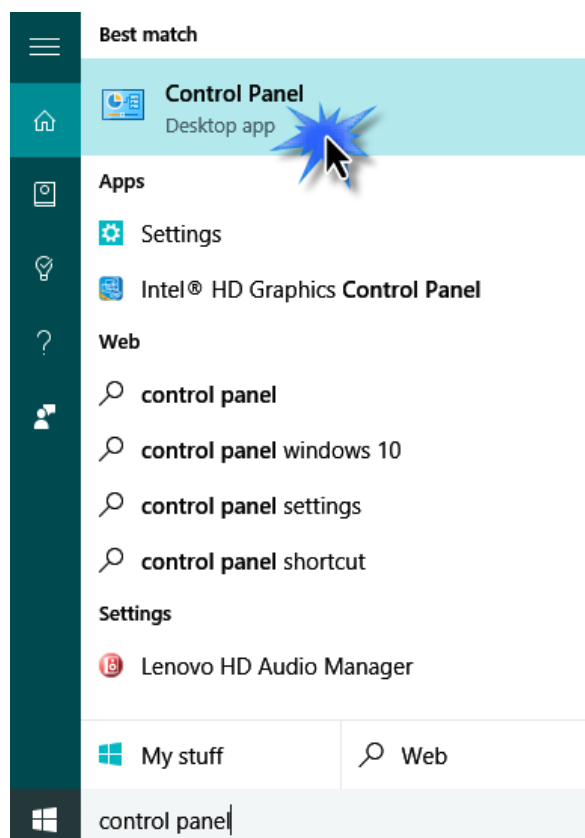

2. Selezionare “Disinstalla un programma” sotto la categoria Programmi.

[Adjust your computer's settings](#)

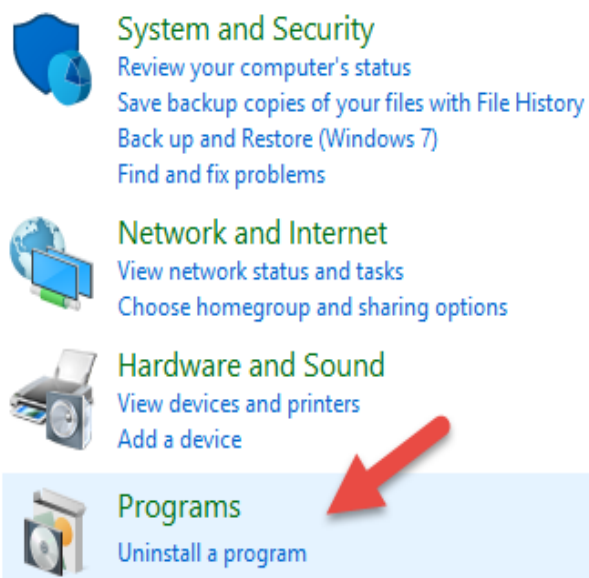

3. Selezionare " Edimax" (o simili), quindi fare clic su "Disinstalla".

Organize ▾ Uninstall Change		
Name	Publisher	Installed On
 Edimax 10 Gigabit Ethernet SFP+ PCI Express Adapter	Edimax	06/05/2017
 Microsoft Office 365 Small Business P... - en-us	Microsoft Corporation	02/05/2017
 Lenovo System Interface Foundation	Lenovo	29/04/2017
 Mozilla Firefox 52.0.1 (x86 en-US)	Mozilla	29/04/2017

COPYRIGHT

Copyright © Edimax Technology Co., Ltd. all rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise, without the prior written permission from Edimax Technology Co., Ltd.

Edimax Technology Co., Ltd. makes no representations or warranties, either expressed or implied, with respect to the contents hereof and specifically disclaims any warranties, merchantability, or fitness for any particular purpose. Any software described in this manual is sold or licensed as is. Should the programs prove defective following their purchase, the buyer (and not this company, its distributor, or its dealer) assumes the entire cost of all necessary servicing, repair, and any incidental or consequential damages resulting from any defect in the software. Edimax Technology Co., Ltd. reserves the right to revise this publication and to make changes from time to time in the contents hereof without the obligation to notify any person of such revision or changes.

The product you have purchased and the setup screen may appear slightly different from those shown in this QIG. The software and specifications are subject to change without notice. Please visit our website www.edimax.com for updates. All brand and product names mentioned in this manual are trademarks and/or registered trademarks of their respective holders.

FCC Caution

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the authority to operate equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Safety

This equipment is designed with the utmost care for the safety of those who install and use it. However, special attention must be paid to the dangers of electric shock and static electricity when working with electrical equipment. All guidelines of this and of the computer manufacture must therefore be allowed at all times to ensure the safe use of the equipment.

EU Countries Intended for Use

The ETSI version of this device is intended for home and office use in Austria, Belgium, Bulgaria, Cyprus, Czech, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Turkey, and United Kingdom. The ETSI version of this device is also authorized for use in EFTA member states: Iceland, Liechtenstein, Norway, and Switzerland.

EU Countries Not Intended for Use

None

EU Declaration of Conformity

- English:** This equipment is in compliance with the essential requirements and other relevant provisions of Directive 2014/30/EU.
- Français:** Cet équipement est conforme aux exigences essentielles et autres dispositions de la directive 2014/30/EU.
- Čeština:** Toto zařízení je v souladu se základními požadavky a ostatními příslušnými ustanoveními směrnice 2014/30/EU.
- Polski:** Urządzenie jest zgodne z ogólnymi wymaganiami oraz szczególnymi warunkami określonymi Dyrektywą UE 2014/30/EU.
- Română:** Acest echipament este în conformitate cu cerințele esențiale și alte prevederi relevante ale Directivei 2014/30/EU.
- Русский:** Это оборудование соответствует основным требованиям и положениям Директивы 2014/30/EU.
- Magyar:** Ez a berendezés megfelel az alapvető követelményeknek és más vonatkozó irányelveknek (2014/30/EU).
- Türkçe:** Bu cihaz 2014/30/EU. direktifleri zorunlu istekler ve diğer hükümlerle ile uyumludur.
- Українська:** Обладнання відповідає вимогам і умовам директиви 2014/30/EU.
- Slovenčina:** Toto zariadenie spĺňa základné požiadavky a ďalšie príslušné ustanovenia smerníc 2014/30/EU.
- Deutsch:** Dieses Gerät erfüllt die Voraussetzungen gemäß den Richtlinien 2014/30/EU.
- Español:** El presente equipo cumple los requisitos esenciales de la Directiva 2014/30/EU.
- Italiano:** Questo apparecchio è conforme ai requisiti essenziali e alle altre disposizioni applicabili della Direttiva 2014/30/EU.
- Nederlands:** Dit apparaat voldoet aan de essentiële eisen en andere van toepassing zijnde bepalingen van richtlijn 2014/30/EU.
- Português:** Este equipamento cumpre os requisitos essenciais da Directiva 2014/30/EU.
- Norsk:** Dette utstyret er i samsvar med de viktigste kravene og andre relevante regler i Direktiv 2014/30/EU.
- Svenska:** Denna utrustning är i överensstämmelse med de väsentliga kraven och övriga relevanta bestämmelser i direktiv 2014/30/EU.
- Dansk:** Dette udstyr er i overensstemmelse med de væsentligste krav og andre relevante forordninger i direktiv 2014/30/EU.
- suomen kieli:** Tämä laite täyttää direktiivien 2014/30/EU. oleelliset vaatimukset ja muut asiaankuuluvat määräykset.

FOR USE IN

AT	BE	CY	CZ	DK	EE	FI	FR	RU				
DE	GR	HU	IE	IT	LV	LT	LU	MT	NL	PL	PT	UA
SK	SI	ES	SE	GB	IS	LI	NO	CH	BG	RO	TR	



WEEE Directive & Product Disposal



At the end of its serviceable life, this product should not be treated as household or general waste. It should be handed over to the applicable collection point for the recycling of electrical and electronic equipment, or returned to the supplier for disposal.

Declaration of Conformity

We, Edimax Technology Co., Ltd., declare under our sole responsibility, that the equipment described below complies with the requirements of the European Radio Equipment directives.

Equipment: 3-speed 2.5GBase-T / NBASE-T Network Adapter Card
Model No.: EN-9225TX-E

The following European standards for essential requirements have been followed:

Directives 2014/30/EU

Spectrum : EN 55032:2015+AC:2016 Class B
AS/NZS CISPR 32:2015 Class B
EN 55035:2017

Edimax Technology Europe B.V.
Fijenhof 2,
5652 AE Eindhoven,
The Netherlands

a company of :
Edimax Technology Co., Ltd.
No. 278, Xinhua 1st Rd.,
Neihu Dist., Taipei City,
Taiwan

Signature:

Printed Name: David Huang
Title: Director
Edimax Technology Europe B.V.



Date of Signature: Jan., 2020

Signature:

A handwritten signature in black ink, appearing to be 'Albert Chang'.

Printed Name:

Albert Chang

Title:

Director
Edimax Technology Co., Ltd.

Declaration of Conformity

We, Edimax Technology Co., Ltd., declare under our sole responsibility, that the equipment described below complies with the requirements of the European Radio Equipment directives.

Equipment: 5-speed 10GBase-T / NBASE-T Network Adapter Card
Model No.: EN-9320TX-E V2

The following European standards for essential requirements have been followed:

Directives 2014/30/EU

Spectrum : EN 55032:2015+AC:2016 Class B
EN 55035:2017
AS/NZS CISPR 32:2015 Class B
CISPR 32:2015+C1:2016 Ed. 2.0 Class B

Edimax Technology Europe B.V.
Fijenhof 2,
5652 AE Eindhoven,
The Netherlands

a company of :
Edimax Technology Co., Ltd.
No. 278, Xinhua 1st Rd.,
Neihu Dist., Taipei City,
Taiwan

Signature:

Printed Name: David Huang
Title: Director
Edimax Technology Europe B.V.



Date of Signature: Jan., 2020

Signature:

A handwritten signature in black ink, appearing to read 'Albert Chang'.

Printed Name:

Albert Chang

Title:

Director

Edimax Technology Co., Ltd.