

8:4 S-VIDEO VIDEO AUDIO MATRIX SWITCHER

SB-5560 MATRIX SWITCHER 8:4 Ear mountable




SB-5560MRM 19 inch Rack Mount



SB-5560 is S-Video/Composite Video/Stereo Audio matrix Switcher. Each one has 8 inputs to 4 outputs, and use for matrix routing signals from source devices. It's matrix router, any input may be routed to any output. Or the same input may be routed to all outputs or any combination. Control is provide via press buttons with LED readout or IR remote controller. RS232 interface is provide interface with third party control. A Windows-based control software package is including to provide complete control of the SB-5560 from a PC.

SB-5560 S-VIDEO / VIDEO / AUDIO MATRIX SWITCHER 8:4

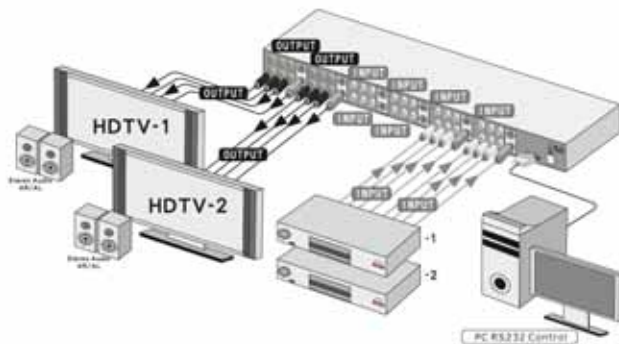

FEATURES

1. Support S-Video/Composite Video/Stereo Audio Matrix Switcher
2. Input: 8x S-Video+Composite Video+Stereo Audio
Output: 4x S-Video+Composite Video+Stereo Audio
3. Support 19 inch Ear and Rack mountable
4. A RS232 serial port interface on the rear panel
5. Support RS232 interface control driver for 95/98/2000/xp
6. High resolution Support: HDTV 480p, 720p, 1080i, 1080p
7. An IR transceiver on the front panel and an IR External device connection support on the rear panel
8. 1 x DC input at rear panel
9. LED status for each output port
10. 1x ON/OFF power switch

SPECIFICATIONS

1. Type of Switcher: 8 x 4 S-Video/Composite Video/Stereo Audio Matrix Switcher
2. Type of Signal: S-Video/Composite Video/Stereo Audio connectors
3. Video Bandwidth: 250MHz(-3dB), 200 mVp-p
4. Excellent ESD rating: exceeds 4000V
5. Controls: RS232, IR, IR EXT, Select buttons on the front panel.
6. Safety Approvals: CE, FCC, RoHS (2002/95/EC)
7. Dimension: 19" x 1.75"
8. Power Supply: DC12V /2mA