



## SEC-MON40 19" LCD/TFT MONITOR

### Introduction:

LCD/TFT monitor with improved LCD panel for CCTV systems which are powered on for 24 hours a day. High stability pictures and clear colors. Advanced circuits for better capability of dealing with the video signal and reducing interference to the monitor. Equipped with VGA for computer use, S-Video for video and two loudspeakers.


### Important safety precautions:

- To reduce risk of electric shock, this product should ONLY be opened by an authorized technician when service is required. Disconnect the product from mains and other equipment if a problem should occur.




- Clean only with a dry cloth. Do not use cleaning solvents or abrasives. Use only cleaning solutions especially for LCD cleaning. Clean only when the monitor is disconnected from mains.
- Do not expose the product to water or moisture.
- Do not use accessory devices not recommended by the manufacturer .Incorrect usage of accessory device may cause accident or damage to the monitor.
- Use only the supplied AC/DC power adapter. Before connecting the AC power cord to the socket , please check if the specified requirements of the adapter accord with the local power supply network. Please contact your dealer or the local power supply administration if you are not sure about the power supply to be used.
- Do not place anything on the power cord .A damaged power cord may cause electric shock or fire.
- Pull out the power plug if the monitor will not be used it for an indefinite period of time.
- Do not place the monitor on an unsteady surface.
- Assure air ventilation around the machine, and do not over or block the vent holes
- The LCD screen is made of sensitive materials. Do not touch the LCD screen with any object.
- Do not place the monitor in direct sunlight or near a heat source such as or other objects that generate heat.
- Do not switch on/off the monitor if it is switched on/off for less than 2 seconds.

### Description connectors back panel:

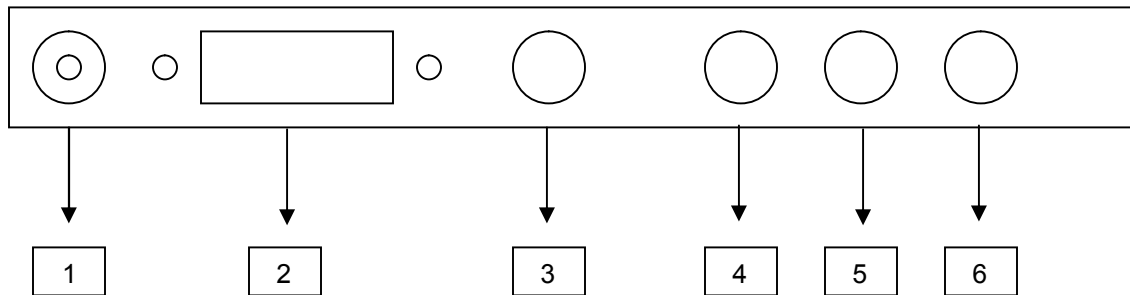

1. 12VDC power in
2. VGA in
3. S-Video in
4. Video in
5. Audio (R) in
6. Audio (L) in

### Description front panel:

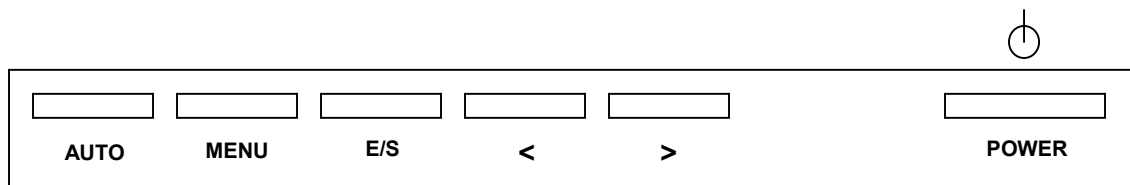

#### **AUTO**

Channel input selection (Escape MENU)

#### **MENU**

Enter MENU (Select options)

#### **E/S**

Select value in MENU

#### **<**

Decrease value

#### **>**

Increase value



Green, monitor ON

Red, monitor Standby

## Description remote control:

POWER	On/off
MUTE	Mute sound
VGA	PC mode shortcut key
AV	AV mode shortcut key
SV	S-VIDEO mode shortcut key
SELECT/INPUT	Display mode selection
MENU/ESC	Exit
△	Menu up
VOL-	Menu left /increase volume
ENTER	Menu enter / exit
VOL+	Menu right /decrease volume
▽	Menu down



## Operation:

- 1) Connect, before powering on, first all devices to the monitor.
- 2) Connect the supplied AC/DC adapter and power on the monitor.
- 3) Select input (AV, SVIDEO, VGA)
- 4) Adjust settings by using the menu to set personal preferences.

## Resolution support:

Resolution	640*480	800*600	1024*768	1280*1024	1440*900	1680*1050
Horizontal Frequency ( KHZ )	31.46-37.50	37.88-46.88	48.36-60.02	63.98-79.98	56.75	66.15
Vertical Frequency (HZ)	60-70	60-75	60-75	60-75	60	60

## Specifications:

Panel size: 19" (48cm) TFT LCD  
Response time: 8-12ms  
Resolution: 1280x1024  
Brightness: 400cd/m2  
Contrast ratio: 500:1  
Screen life span: 50.000 hours (intensive use)  
Viewing angle: 170 degree  
System: PAL/NTSC  
Inputs: Video, S-Video, VGA  
Power: DC12V, 5A  
Dimensions: 42x42x5.5cm (included stand)

## Declaration of conformity

We,  
Nedis B.V., De Tweeling 28, 5215MC 's-Hertogenbosch, The Netherlands  
Tel.: 0031 73 599 1055, Email: [info@nedis.com](mailto:info@nedis.com)

Declare that product:

Name: **König Security**, Model: **SEC-MON40**,  
Description: **19" LCD/TFT monitor**

Is in conformity with the following standards

EMC: EN55013: 2001+A1:2003, EN61000-3-2:2000,  
EN61000-3-3:1995+A1:2001

LVD: EN60950-1:2006

Following the provisions of the 89/336/EEC and 2006/95/EC directive.

's-Hertogenbosch, 27-03-2008  
Mrs. J. Gilad  
Purchase Director



## Warranty:

No guarantee or liability can be accepted for any changes and modifications of the product or damage caused due to incorrect use of this product.

## General:

Designs and specifications are subject to change without notice.

All logos brands and product names are trademarks or registered trademarks of their respective holders and are hereby recognized as such.

## Attention:



This product is marked with this symbol. It means that used electrical and electronic products should not be mixed with general household waste.

There is a separate collections system for these products.